


## ANCHOR ( OMEGA ) SHACKLE



## FORGED ANCHOR SHACKLE, CARBON STEEL

- Shackles are Type Approved by DNV & ABS.
- Shackles are forged carbon steel with alloy pin, Dacormet Finish.
- Size and Working Load Limit permanently shown on each shackle.
- All shackles with Batch Code which links to Test Certificate and quality traceability.
- 100% magnaflux crack detection during manufacturing.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- Meet the performance requirements of Federal Specification RR-C-271D, Type 4A, Grade A, Class 3.
- Minimum Ultimate Load is 6 times the Working Load Limit.

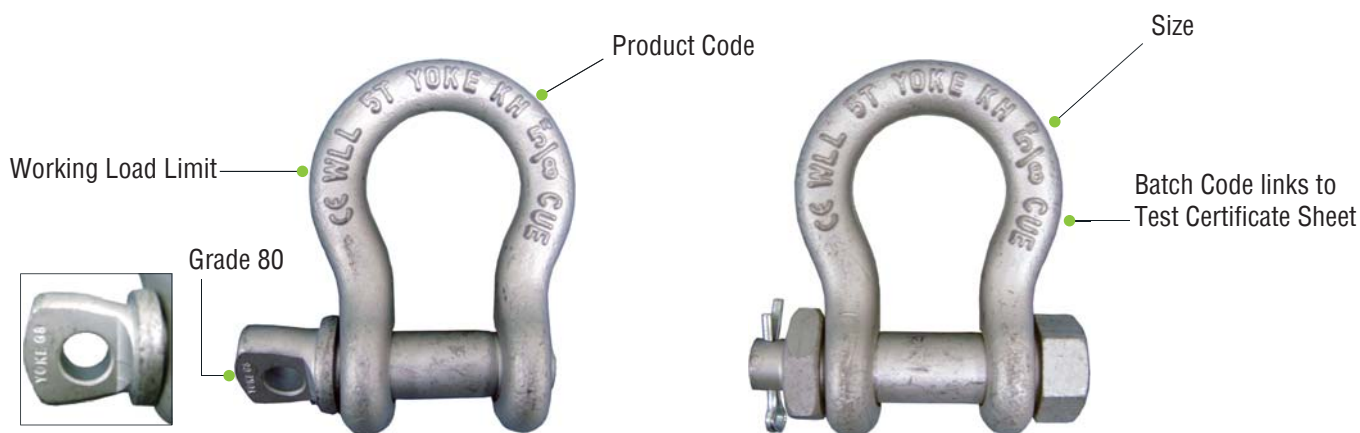

## FORGED ALLOY ANCHOR SHACKLE

- Shackles are Type Approved by DNV & ABS.
- Shackles are forged alloy steel with alloy pin, Dacromet Finish.
- Size and Working Load Limit permanently shown on each shackle.
- All shackles with Batch Code which links to Test Certificate and quality traceability.
- 100% magnaflux crack detection during manufacturing.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- Meet the performance requirements of Federal Specification RR-C-271D, Type 4A, Grade B, Class 3.
- Minimum Ultimate Load is 5.4 times the Working Load Limit.

Product Code	Description
SS-S3250	5 / 8" screw pin type, carbon steel, WLL 3 1/4 tones.
SS-N3250	5 / 8" bolt and nut safety type, carbon steel, WLL 3 1/4 tones.
SS-S5000	5 / 8" screw pin type, alloy steel, WLL 5 tones.
SS-N5000	5 / 8" bolt and nut safety type, alloy steel, WLL 5 tones.

## WARNING

1. Don't exceed the shackle capacity. Shackle capacity decrease subject to the angle of loading.

Angle of Loading	Reduction to Working Load Limit
45 degree	30 % reduction
90 degree	50 % reduction

2. When two slings are used on a shackle, the load rating is based on the load regardless of the inclined angle as long as it is less than 120 degree.

